



LS-Series

FLIR LS-SERIES

LS-X and LS-XR Compact Thermal Night Vision Monocular


TACTICAL ADVANTAGE IN THE PALM OF YOUR HAND

Introducing the upgraded FLIR LS Series, the newest compact thermal night vision camera designed specifically for law enforcement. For years, law enforcement agencies around the world have been using FLIR's handheld systems for surveillance, pursuit, capture and evidence gathering. FLIR has combined extensive experience in law enforcement and military applications with the latest technical innovation to bring you the enhanced FLIR LS Series.

No matter how clever a suspect may be, they can't hide their heat. Rather than rush on the scene with a flashlight that instantly gives away your position and only illuminates your immediate area, FLIR LS is just as portable, and exponentially more effective. Search the scene for discarded evidence in pitch black conditions where traditional night vision fails. You can see through smoke, dust and light fog. Even light foliage and camouflage are powerless against thermal imaging. Take away every hiding spot with FLIR LS Series.



Assailant trying to dispose of evidence

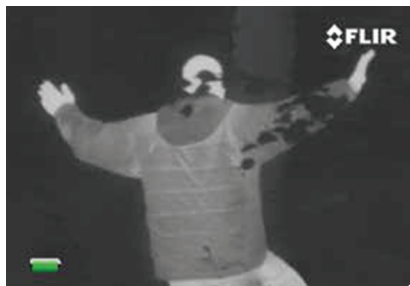


Suspect subdued and in custody

Visit www.FLIR.com/LSSeries for more information, including a product selector guide, interactive simulator, case studies, videos and more.

Specifications

Camera System	LS-X	LS-XR
FOV	17° × 13° NTSC	18° × 14° NTSC
Start up	< 1.5 seconds	
Waveband	7.5 - 13.5 μm	
Thermal Sensitivity	<50 mK @ f/1.0	
Detector Type	336 × 256 VOx Microbolometer	640 × 512 VOx Microbolometer
Image Processing	FLIR Proprietary Digital Detail Enhancement	
User Interface		
Splash Screen	Generic	
Power Button	On/Off	
Zoom Button	2X & 4X	2X, 4X & 8X
Black Hot/White Hot	BH/WH/IntsAlert	
Brightness	Brightness	
Laser Pointer	Red Laser Pointer	
Image Presentation		
Built-In Display	640 X 480 LCD Display	
Video Output	NTSC composite video Thru USB port via Custom USB to RCA cable. Output switchable to PAL via user GUI	
Video Refresh Rate	<9Hz NTSC or 60 Hz	<9Hz NTSC or 30 Hz
Image Polarity	White Hot/Black Hot/InstAlert; Selectable	
On-Screen Symbology	Standard	
Power		
Battery Type	Internal Li-Ion Cell	
Battery Life (Operating)	>5 Hours	
Environmental		
Rating	IP-67, Submersible	
Operating Temperature	-4°F to 122°F (-20°C to 50°C); Laser = 4°F to 122°F (-10°C to 50°C)	
Storage Temperature	-40°F to 140°F (-40°C to 60°C)	
Drop Test Rating	1 m drop	
Physical		
Weight	12 oz (340 g)	
Dimensions	6.70" × 2.31" × 2.44"	
Range Performance (No Extender)*		
Detect Man (1.8 m × 0.5 m):	570 meters	1140 meters
Detect Small Vessel (2.3 m × 2.3 m):	1550 meters	3000 meters
Package Includes		
Handheld Thermal Camera, USB Power Adapter/Charger, Wrist strap, Custom Video out cable, USB Cable, Quick Start Guide, Molle bag		

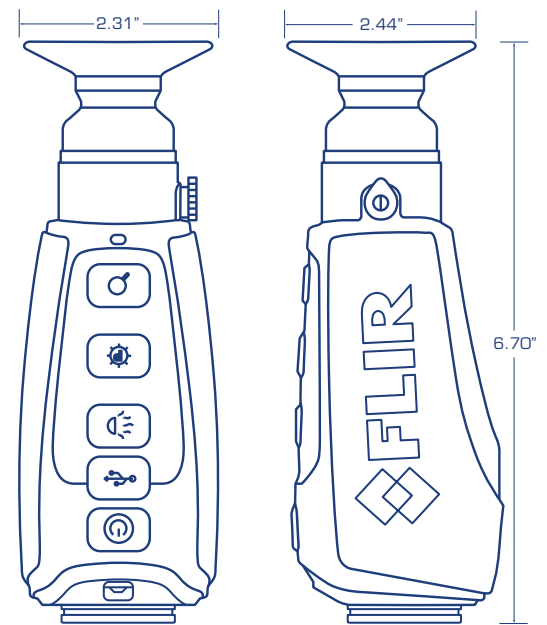

SANTA BARBARA

FLIR Systems, Inc.
70 Castilian Drive
Goleta, CA 93117
USA
PH: +1 805.690.5097

PORTLAND

Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

BELGIUM

FLIR Systems
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

BILLERICA

FLIR Systems, Inc.
25 Esquire Road
N. Billerica, MA 01862
PH: +1 866.404.5627

www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. (Updated 03/09/15)